

BI-FOLD PLUS

SYSTEM

Sightline Jamb 89 mm, Meeting Stile 110 mm

Polyamide strip length

Frame 45 mm

Sash 45 mm

Profile thickness

Door 1.8 mm

Glazing

Max. 48 mm, Min. 25 mm

Maximum sash dimensions

Width (L) 1,200 mm, Height (H) 3,000 mm

Maximum sash weight

120 kg

Consult maximum weight and dimensions according to typologies






Separate environments and unify spaces with this Bi-fold door system with an 80 mm deep frame. This evolution of the Bi-fold series offers an excellent thermal and acoustic performance, thanks to its 45 mm thermal break and a glazing capacity up to 48 mm. Besides, it presents a slim central section of 110 mm, which maximizes the glazed surface, filling the interior spaces with natural light.




- High thermal & acoustic performance
- Maximized glazed surface
- Double bearing system with a gimbal stabiliser
- Faster manufacturing
- High security

BFRC Rating
kWh/(m².yr)



Double glazing

BFRC Rating
kWh/(m².yr)




Triple glazing

48 mm
max. glazing capacity





Faster manufacturing
Possibility of providing
inserted gaskets

45 mm
thermal break

Double bearing
system with a
gimbal stabiliser

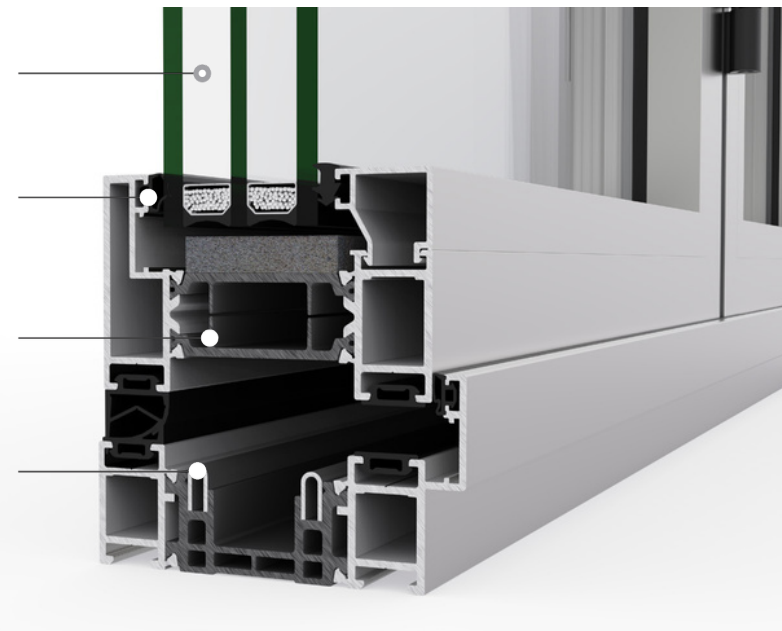


DRAINAGE SUBCILLS

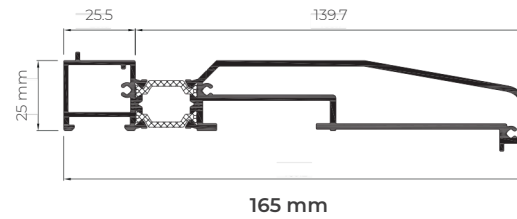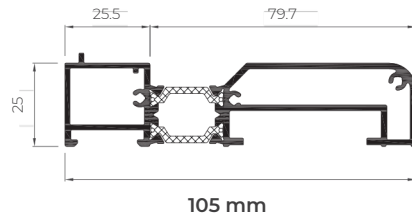


PROFILES WITH INSERTED GASKET


Sash

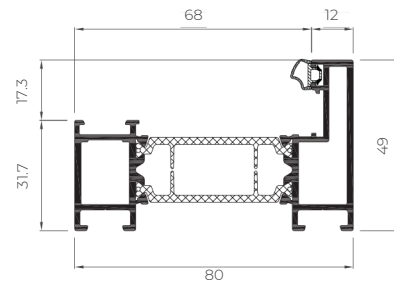

Outer Frame

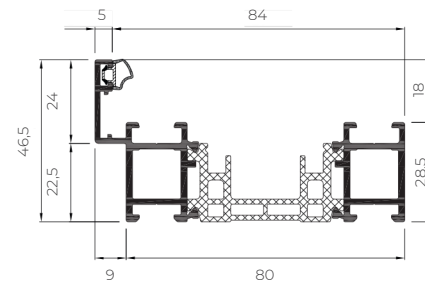


Glazing beads

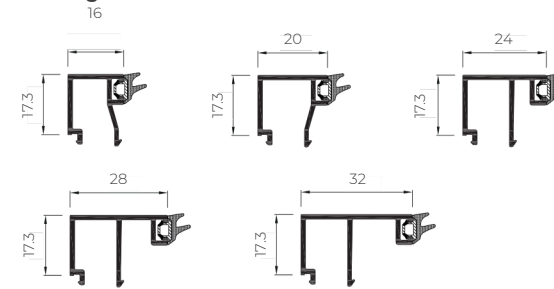


HEAD EXTENSION

Head extension 25 mm

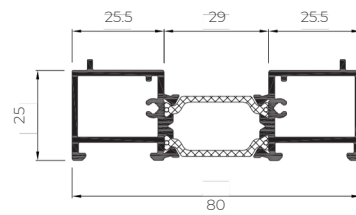

Head extension 37 mm



OPENING POSSIBILITIES



Inward
Up to 14 sashes

Outward
Up to 14 sashes
90° corner sash without mullion

POSSIBILITIES



SECURITY
HARDWARE



ACCESSIBILITY