

BI-FOLD

SYSTEM

Sightline Frame 73 mm, Sash 73 mm

Polyamide strip length

Frame 20 mm

Sash 30 mm

Profile thickness

Door 1.8 mm

Glazing

Max. 45 mm, Min. 25 mm


Maximum sash dimensions

Width (L) 1,200 mm, Height (H) 3,000 mm

Maximum sash weight

120 kg

Consult maximum weight and dimensions according to typologies

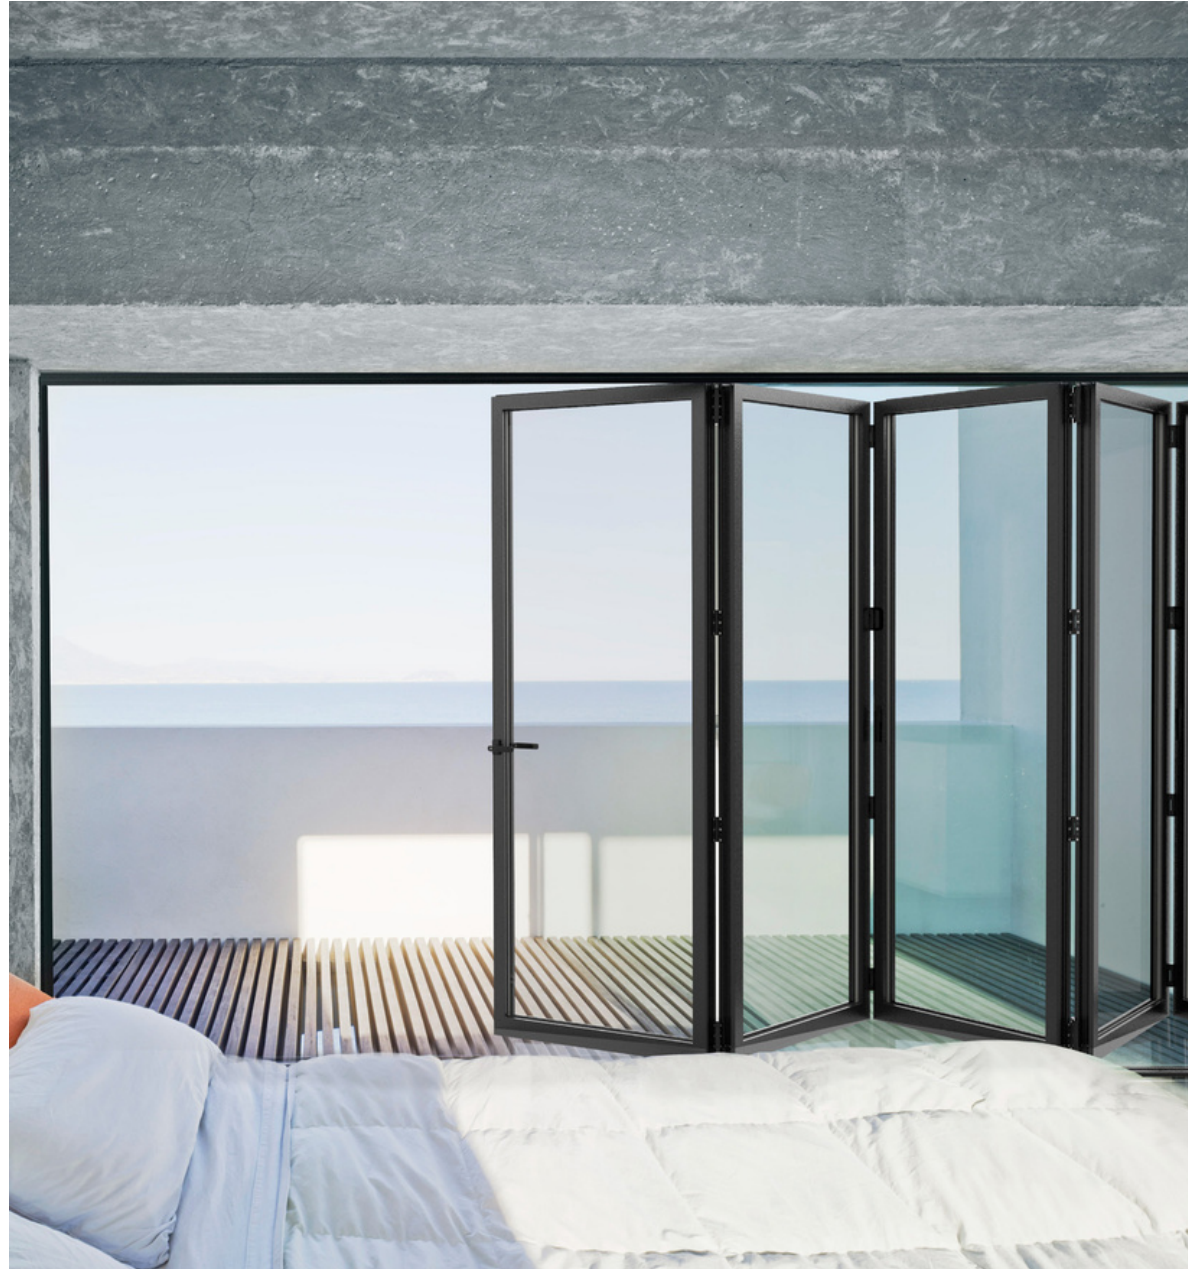



Bi-fold door system with 73 mm of frame depth and optimal thermal and acoustic performances, ideal for moderate climates.



- Maximum sizes 1,200 x 3,000 mm
- Open corner solution
- Up to 14 sashes
- Adjustable jamb available
- High security

BFRC Rating
kWh/(m²·yr)


≥20	A ++
>10 to <20	A +
0 to <10	A
-10 to <0	B
-20 to <-10	C ✓
-30 to <-20	D
-50 to <-30	E

Double glazing

BFRC Rating
kWh/(m²·yr)




≥20	A ++
>10 to <20	A +
0 to <10	A
-10 to <0	B ✓
-20 to <-10	C
-30 to <-20	D
-50 to <-30	E

Triple glazing

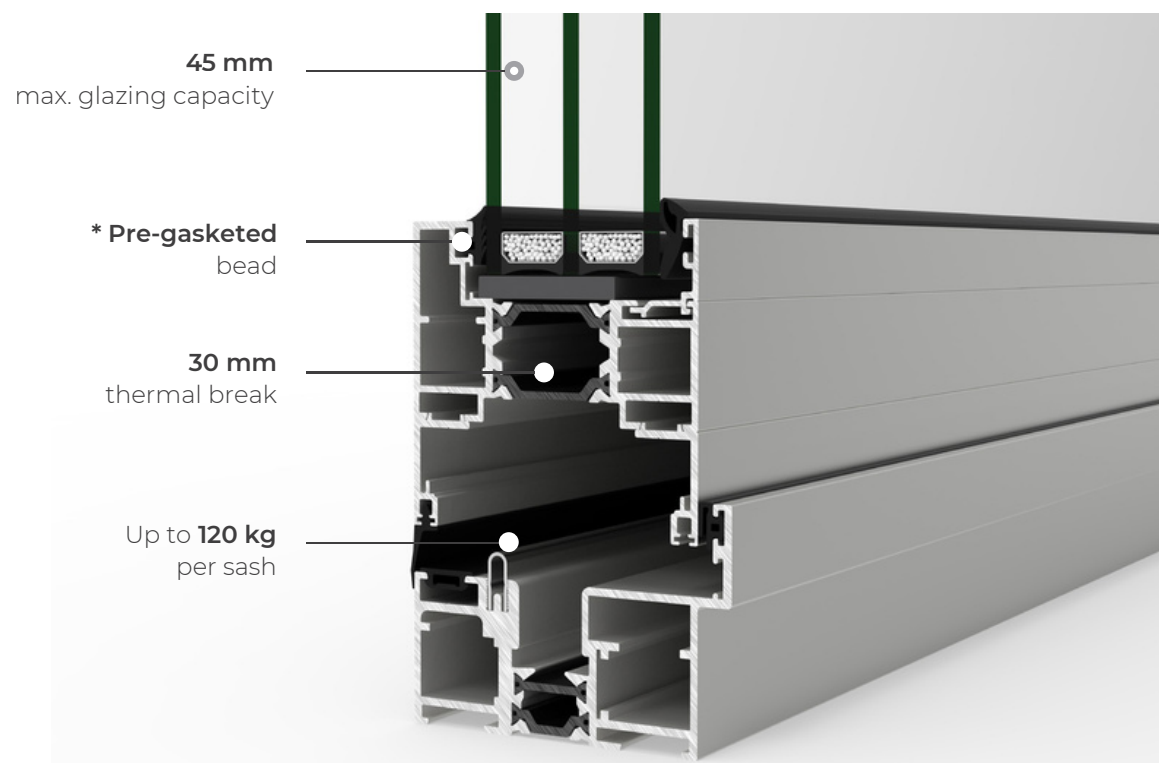


* Available for 24 and 28 mm glazing only


DRAINAGE SUBCILLS

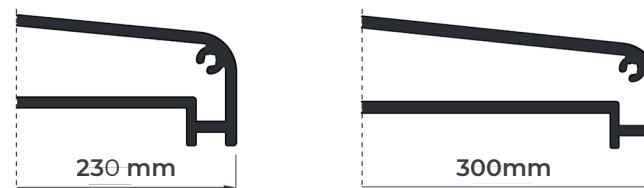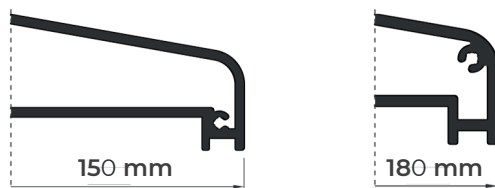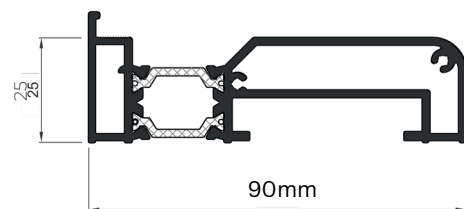


FRAME

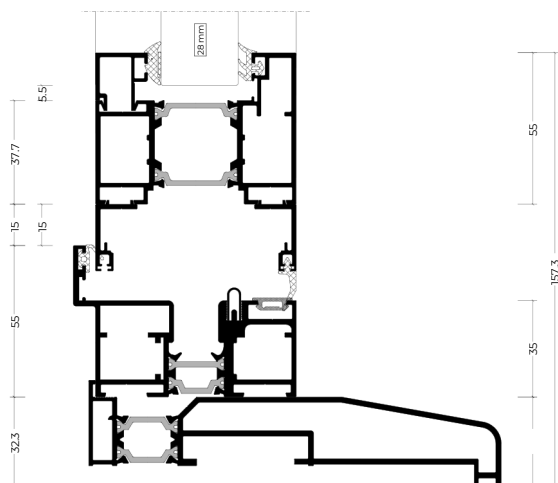

THRESHOLD

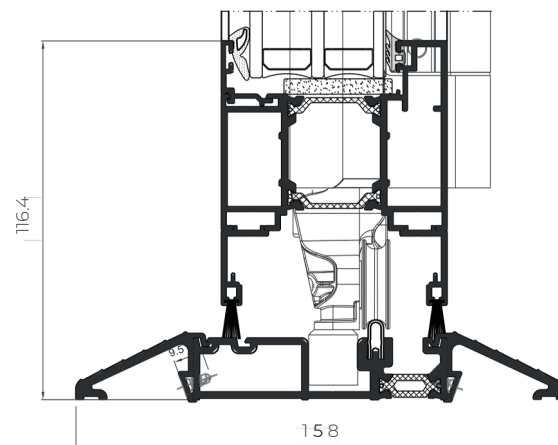


SLIM SIGHTLINES

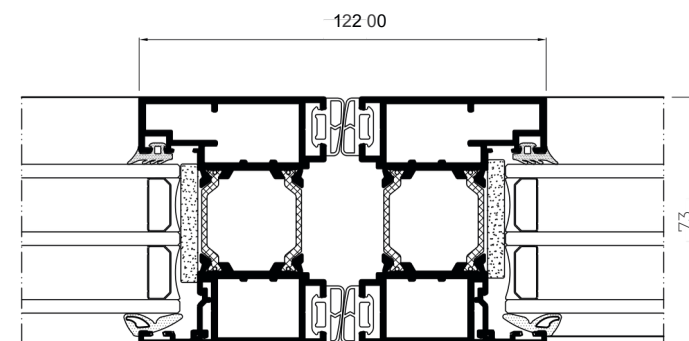


HEAD EXTENSION

Head extension 20 mm

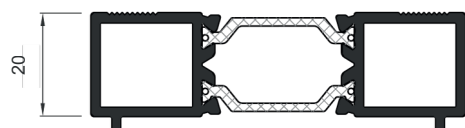

Head extension 38 mm

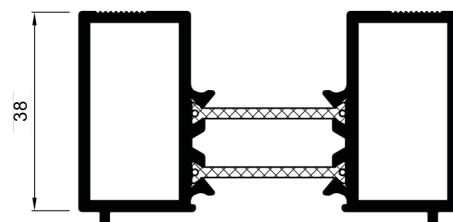

OPENING POSSIBILITIES



Inward
Up to 14 sashes

Outward
Up to 14 sashes
90° corner sash without mullion

POSSIBILITIES

